MT2E SERIES

LS Tractor

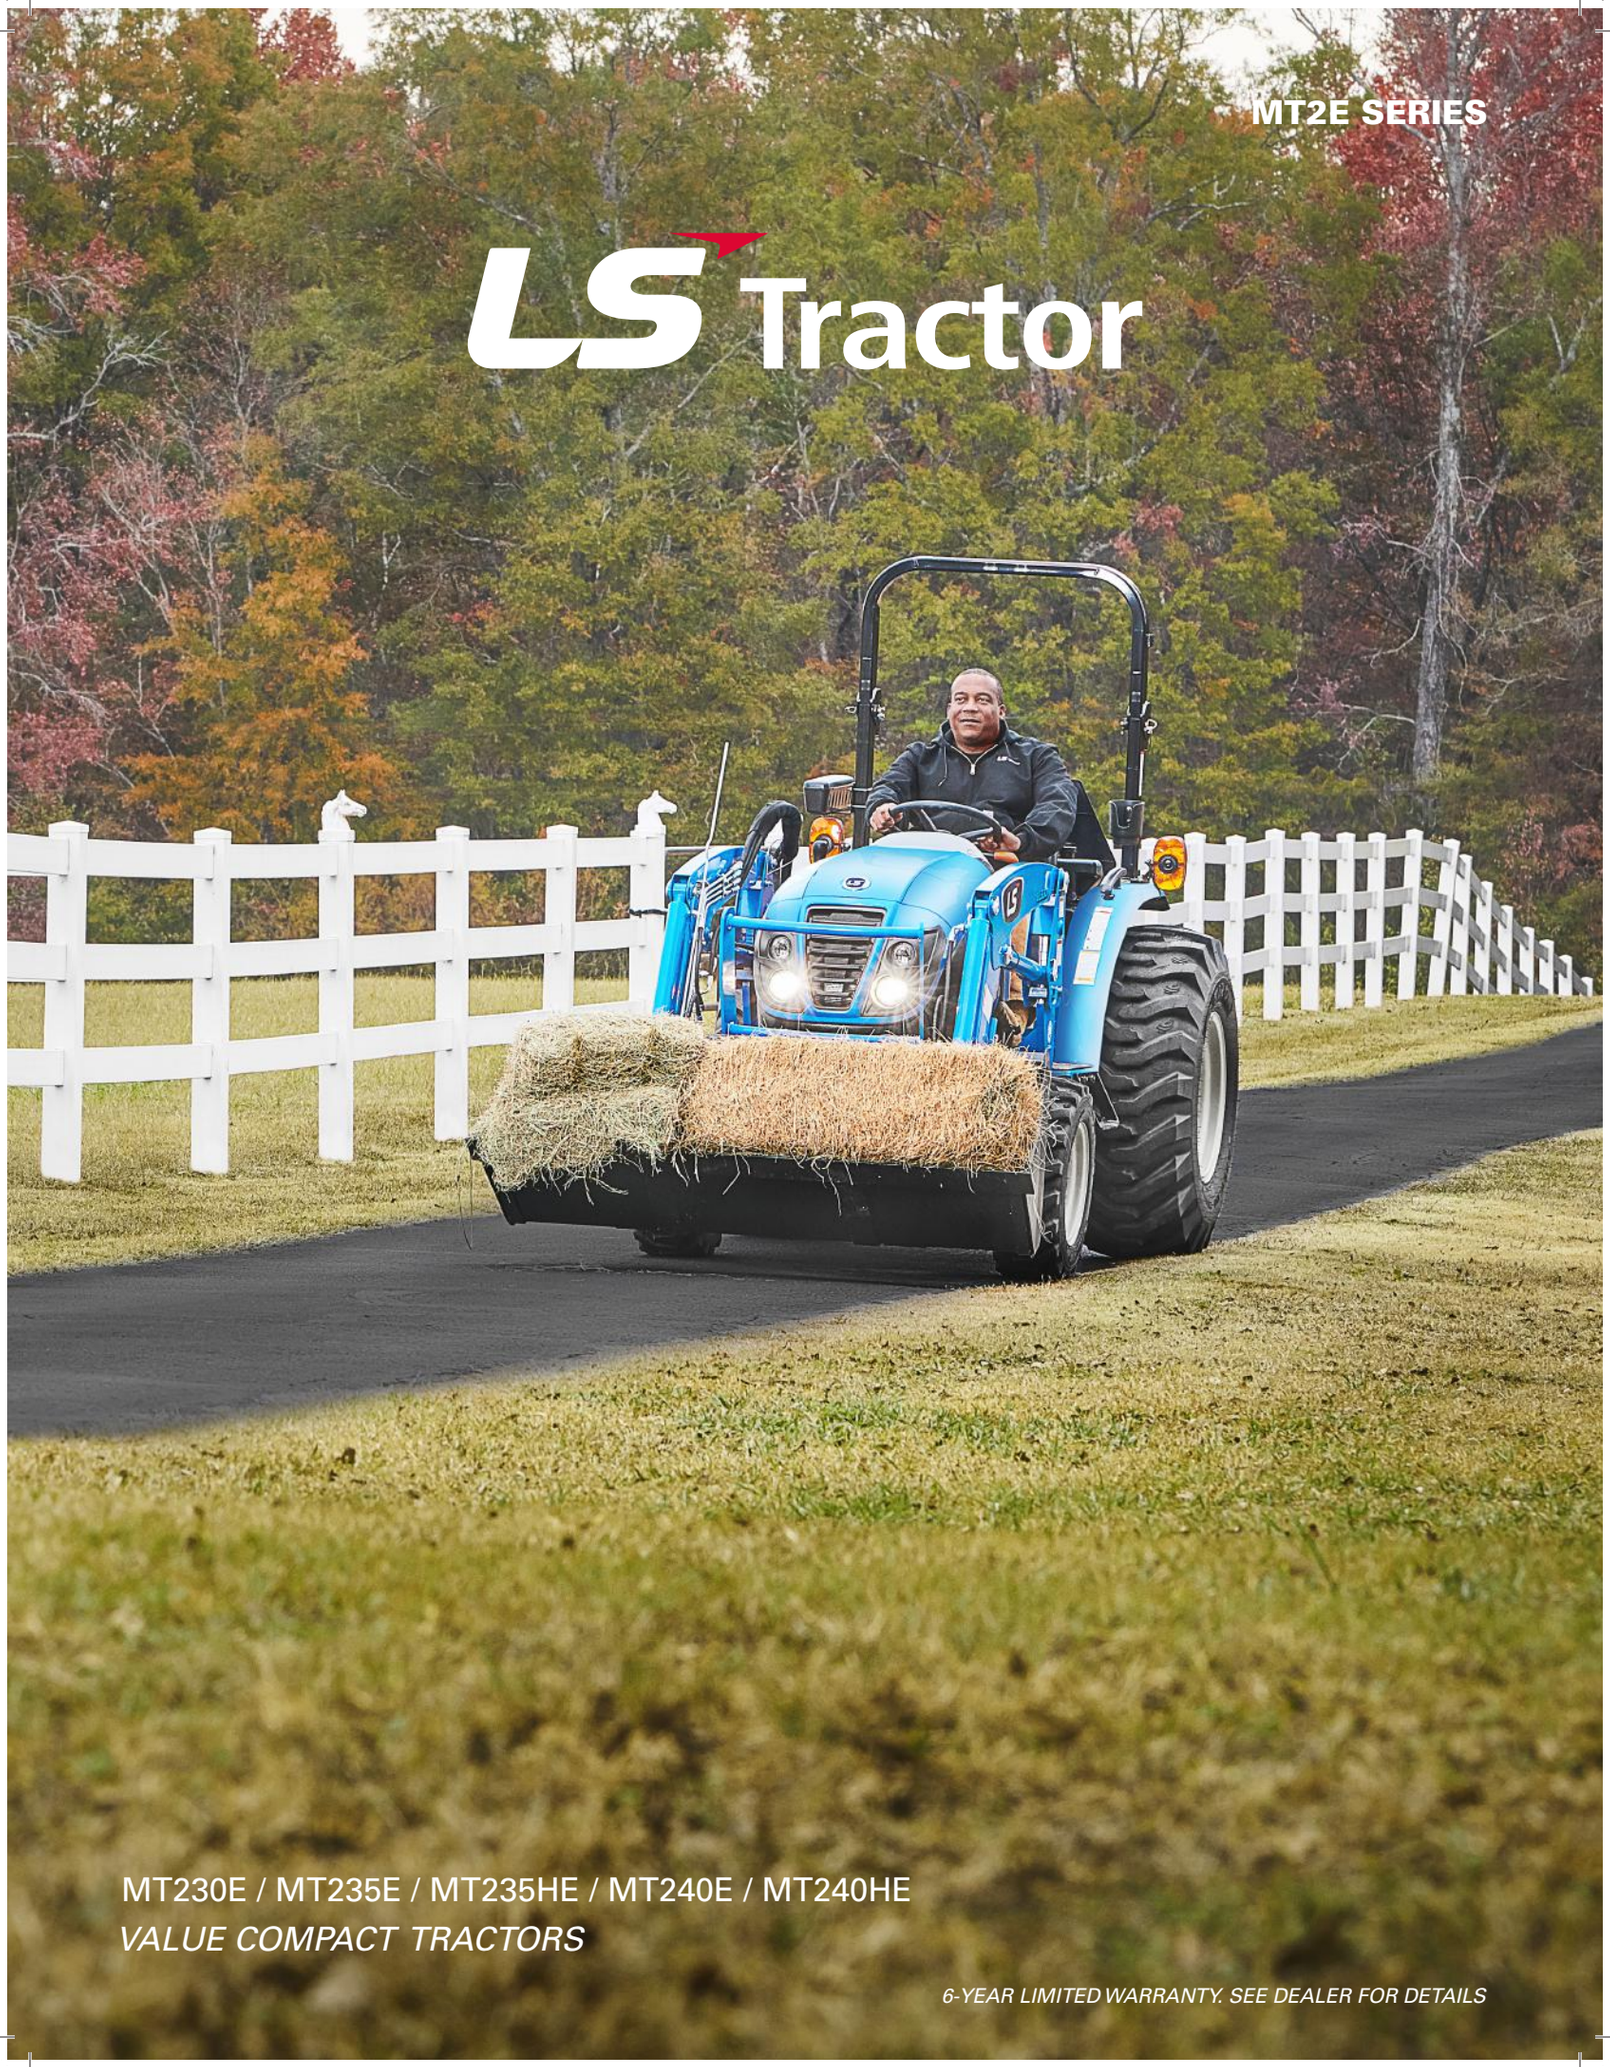

MT230E / MT235E / MT235HE / MT240E / MT240HE

VALUE COMPACT TRACTORS

6-YEAR LIMITED WARRANTY. SEE DEALER FOR DETAILS

MT2E SERIES

VALUE COMPACT TRACTORS

RECOMMENDED IMPLEMENTS/ ATTACHMENTS

LOADER:
High Capacity With An Abundance Of Standard Features

BACKHOE:
Excellent Capacity, Smooth And Consistent Operation For Added Control



ROTARY CUTTER:
Durable Heavy Steel Design Providing Quality And Strength

BOX BLADE:
Features A Heavy Welded Steel Design For Use In Demanding Applications

FEATURES

- ***6 Year Warranty****
- ***Available In 30 HP, 35 HP And 40 HP***
- ***3 Range Hydrostatic Transmission (2 Pedal)***
- ***F12xR12 Synchro Shuttle Gear Drive Models***
- ***High Capacity And Performance***



Ergonomically Located And Designed Joystick
Provides Comfortable Access For Loader Operations. 3rd Function (Option)

3 Range Hydrostatic Transmission
(2 Pedal) Comfortable And Efficient Operator Control

Electronic Engagement PTO
Convenient Location

Standard Factory Grille Guard W/ Loader
Full Length Grille Guard Protects Body Panels And Radiator

Synchro Shuttle Shift Transmission
Easily Transition From Forward To Reverse

Rubber Platform Matting And Step
Provide Added Comfort And Access To The Spacious Operator's Platform

High Capacity Three Point
Lifts Up To 1,808 lbs.

Standard Foldable ROPS
Enables Easy Adjustment For Clearance



Skid Steer Quick Connect Loader/Bucket
Transition Between Front Attachments Quickly

SPECIFICATIONS

CATEGORY					
ENGINE	MT230E	MT235E	MT235HE	MT240E	MT240HE
Type	3 Cylinder, Liquid-cooled, Diesel, NA, CRDI			3 Cylinder, Liquid-cooled, Diesel, TC, CRDI	
Model (Tier 4)	L3C19-D3	L3C19-D2		L3C19-T4	
Engine HP (gross)	30	35		40	
PTO (HP)	25.5	29.7	28	34	32
Rated Speed (rpm)	2,600				
Displacement (in^3.)	114.7				
Fuel Tank Capacity (gal.)	7.4				
Alternator (V-A)	12 - 70				
DRIVE TRAIN					
Transmission	Synchro Shuttle	Synchro Shuttle	HST	Synchro Shuttle	HST
No. Of Speed	F12 X R12	F12 X R12	3 Ranges	F12 x R12	3 Ranges
Brakes	Wet, Multi-disc				
PTO					
Type	Independent				
Rear (rpm)	540 (Standard)				
Mid (rpm)	2,000 (Option)				
HYDRAULIC SYSTEM					
Control System	Position				
Implement Pump (gpm)	8.2				
Steering Pump (gpm)	4.1	4.1	5.5	4.1	5.5
Steering	Hydrostatic Power Steering				
Total Flow (gpm)	12.3	12.3	13.7	12.3	13.7
Category (3pt Hitch)	CAT I				
Hitch Lift Capacity (Hitch End) (lbs.)	1,808				
Remote Valves	Option				
DIMENSION					
Overall Length (Frame To Link, in.)	121				
Overall Width With Tires (in.)	54				
Wheelbase (in.)	69				
Height To Top Of ROPS (in.)	88				
TIRE SIZE					
Front / Rear Ag	7 - 14 / 11.2 - 24				
Front / Rear Industrial	25 x 8.5 - 14 / 43 x 16-20				
Front / Rear Turf	25 x 8.5 - 14 / 41 x 14 -20				
WEIGHT					
Total Weight w/o Ballast (lbs.)	2,866	2,866	2,870	2,881	2,884

All Specs and features are subject to change, and pictures could include optional equipment etc.

FRONT END LOADER	LL3301	LL3302
TRACTOR APPLICATION	**MT230E/ MT235E/MT235HE**	**MT240E/ MT240HE**
Bucket Size (in.)	66	
Maximum Lift Height (in.)	94	
Clearance With Attachment Dump (in.)	65.6	
Reach At Maximum Height (in.)	11.5	
Maximum Dump Angle (deg.)	57	
Maximum Rollback Angle (deg.)	40	
Digging Depth (in.)	5.5	
Overall Height In Carry Position (in.)	53	
Lift Capacity (At Pivot Pin) (lbs.)	1,688	2,153
Breakout Force (At Pivot Pin) (lbs.)	2,855	3,579
Approx. Weight (Loader w/o Bucket) (lbs.)	650	653

BACKHOE	LB1105
TRACTOR APPLICATION	**MT230E/MT235E/MT235HE/ MT240E/MT240HE**
Digging Depth (in.)	76.3
Reach From Centerline Of Swing Pivot (in.)	113.1
Loading Height (in.)	63.6
Swing Arc (deg.)	180
Transport Height (in.)	77.2
Bucket Rotating (deg.)	180
Stabilizer Spread (Down Position) (in.)	68.7
Stabilizer Spread (Up Position) (in.)	46.4
Bucket Digging Force (lbs.)	2,817

SNOW BLOWER	LW3163B	LW3174B
TRACTOR APPLICATION	**ALL MT2E SERIES**	**MT240E/MT240HE**
Overall Width (in.)	68	74
Cutting Width (in.)	63, (68 w/Extension)	74
Cutting Height (in.)	23	26
Impeller Drive	Gear Box	
Auger Drive	Worm Gear	Chain Drive
Auger Diameter (in.)	13 3/4	14 3/4
Impeller Diameter (in.)	17 5/8	23 3/4
Number Of Blades On Impeller	4	
Chute Rotation	Hydraulic	
Adjustable Heavy Skid Shoes	Yes	

Additional Equipment

- Standard Factory Toolbox
- Loader/Bucket Indicator Rod
- Platform Step

LS Tractor

LS Tractor USA | P: 252.984.0700 | F: 252.984.0701 | LSTractorUSA.com
(Corporate Address) 6900 Corporation Parkway, Battleboro, NC